



The most complete and innovative
range to automate sliding gates.



Nice





For sliding gates weighing up to 1500 kg.

Versions with electromechanical limit switch (RUN1500) and with inductive limit switch (RUN1500P).

User-friendly: the BlueBUS technology, enables to power and control a maximum of 7 couples of photocells from the MoonBus series using two wires only.

Practical: the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside the motor.

Advanced: the temperature sensor adapts the motor force to weather conditions, setting the thermal cut-out protection accordingly; a master/slave selection automatically synchronises 2 motors, enabling the automation of sliding gates with two opposing leaves.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light. 8 programming levels.

Safe: acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.

Sturdy: aluminium release handle for easy opening.

Very quiet: gear motor on bearings.


Code	Description
RUN1500	Irreversible, 24 Vdc, with built-in control unit, with electromechanical limit switch, for sliding gates weighing up to 1500 kg
RUN1500P	Irreversible, 24 Vdc, with built-in control unit, with inductive limit switch, for sliding gates weighing up to 1500 kg



O-View programmer is used by the installer to advance features and fine tune motor functions.


Technical specifications

Code	RUN1500/1500P
Electrical data	
Power supply (Vac 50/60 Hz)	230
Absorption (A)	2
Power (W)	400
Performance data	
Speed (m/s)	0.25
Force (N)	1000
Work cycle (cycles/hour)	60
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	400x255x390 h
Weight (kg)	19

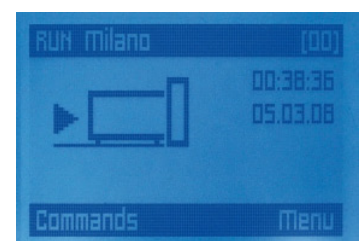

O-View programmer display

Example of general setup with safety including solar

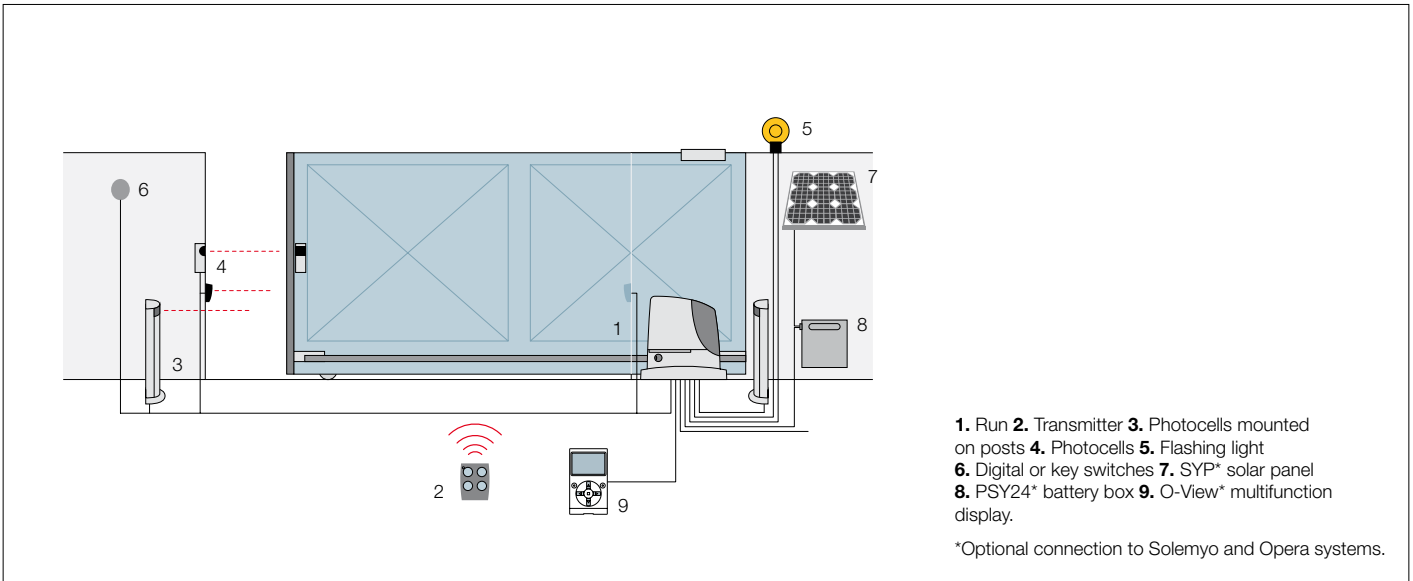

RBA3
Spare control unit



PS124
24 V battery with integrated battery charger.



MOTXR
Wireless keypad



F210B & FA1
Photo safety beam with vandal resistant cover



ON2
Transmitter 433.92 MHz 2 channel



ABF
Tuned 433.92MHz aerial



OLPA
Wireless wall button for multiple functions



OXI
Plug-in receiver



MLBT
Flashing indicator light



MOSE
Key selector switch for outdoor installation



MOCF
Aluminium post for photo cells & key switch



OX2
Pre-wired receiver card for control of Garage doors and external devices



GO
Shockproof cover for NiceWay transmitters

Solemyo system

Opera system



The solar power kit Solemyo to automate gates, garage doors or barrier gates, including those located far from the power mains and without the need for costly and invasive excavation work.



The innovative Opera system enables the installer to manage, program and control automation systems, also remotely, simply and safely, with significant savings in time.



Solemyo solar kit



O-View programmer is used by the installer to advance features and fine tune motor functions



Certified quality.

Safety, quality, reliability and durability are priorities for Nice. All Nice Products in fact comply with the provisions of the **European Directives** governing construction.

Service

Dealers who offer Nice products to their customers believe in the value of quality; providing service that satisfies all the needs and wishes of customers, before and after sales, is a duty. Contact a Nice specialist with complete trust!



Brisbane Automatic Gate Systems
Unit 10, 7-9 Grant Street
CLEVELAND, QLD 4163
Ph: 07 3286 8111
Fax: 07 3286 8113
Email : info@brisbaneautomaticgates.com.au
www.brisbaneautomaticgates.com.au